Tools required:

- 3/8" Nut Driver
- 7/16 socket
- Philips screwdriver

IF YOU HAVE AN OLDER DOG BOX THAT DOESN'T HAVE A MOUNT FOR A PULL STRAP USE #1 IF YOU HAVE MOUNT FOR PULL STRAP USE #2

1)

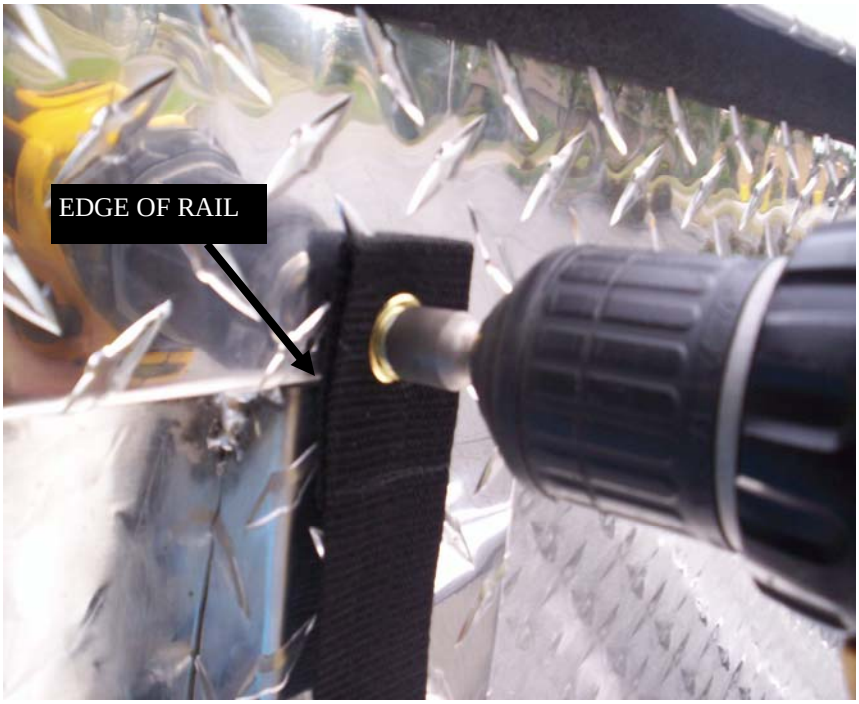

Insert self tapping bolt trough washer in the strap. Screw into top rail in the lid at the furthest position from lip of the lid.

2)

Insert 1/4" Philips head bolt trough washer in the strap, and through strap mount in top of lid. Fasten with 1/4" flanged nut.